




CEE DEE INDUSTRIES

ISO 9001-2008 certified company

LOW PRESSURE HOSE

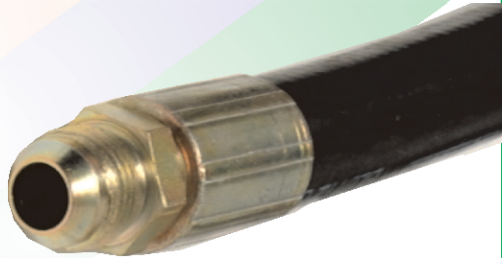

PL6 (SAE100R6)

Hose I.D		Hose O.D		Working Pressure		Minimum Bend Radius		Approx. Weight	
inch	mm	mm	psi	MPa	inch	mm	Lbs/ft	Kg/m	
1/4	6.4	12.7	400	2.8	2.5	64	0.09	0.13	
5/16	7.9	14.3	400	2.8	3.0	76	0.11	0.16	
3/8	9.5	15.9	400	2.8	3.0	76	0.12	0.18	
1/2	12.7	19.8	400	2.8	4.0	102	0.17	0.25	
5/8	15.9	23.0	350	2.4	5.0	127	0.20	0.30	
3/4	19.0	26.6	300	2.1	6.0	152	0.23	0.34	
1	25.4	32.5	190	1.3	9.1	230	0.31	0.46	

Application :
Low pressure hydraulic oil.

Inner Tube :
Synthetic Rubber.

Reinforcement :
One synthetic textile braid.

Cover :
Synthetic Rubber.

Temp. Range :
-40°F to +212°F
(-40°C to +100°C)



CEE DEE INDUSTRIES

ISO 9001-2008 certified company

LOW PRESSURE HOSE



PLC

RECOMMENDED FOR	LOW PRESSURE PETROLEUM BASED OIL LINES, LUBE OIL, DIESEL FUEL LINE
CONSTRUCTION	EXTRUDED RUBBER TUBE OIL RESISTANT SYNTHETIC RUBBER WITH OUTER COVER BLACK TEXTILE BRAID.
STANDARD OPERATING TEMP	DIN 73379 MAX. 80°C.

DN	NORMAL BORE	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
		PSI	BAR	PSI	BAR
	MM				
4	5	285	20	855	60
6	6.4	285	20	855	60
7	7	285	20	855	60
8	8	285	20	855	60
9	9	213	12	640	40
10	11	170	12	510	40
13	12.7	170	12	510	40



CEE DEE INDUSTRIES

ISO 9001-2008 certified company

LOW PRESSURE HOSE



PLW

RECOMMENDED FOR	PETROLEUM BASED OIL LINES, LUBE OIL, DIESEL FUEL OIL LINE,AIR AND WATER FOR REGULAR PRESSURE AND TOUGH HANDLING.
CONSTRUCTION	EXTRUDED RUBBER TUBE OIL RESISTANT RUBBER OUTER GALVANISED ZINC PLATED STEEL WIRE BRAID
STANDARD OPERATING TEMP	DIN 73379 UPTO 100°C.
DISTINGUISHING MARK	YELLOW VESTAN BAND

DN	NORMAL BORE	MAXIMU WORKING PRESSURE		MINIMUM BRUST PRESSURE	
	MM	PSI	BAR	PSI	BAR
4	4.8	600	42	2400	168
6	6.4	500	35	2000	140
7	7	500	35	2000	140
8	8	400	28	1600	112
9	9	400	28	1600	112
10	10	350	24	1400	96
11	11	350	24	1400	96
12	12.7	350	24	1400	96
13	14	300	21	1200	84
16	16	275	19	1100	76
17	17	275	19	1100	76
20	21	250	17	1000	68
26	25.5	225	15	900	60
32	32	200	14	800	56
38	38	175	12	700	48




CEE DEE INDUSTRIES

ISO 9001-2008 certified company

LOW PRESSURE HOSE

PLCW

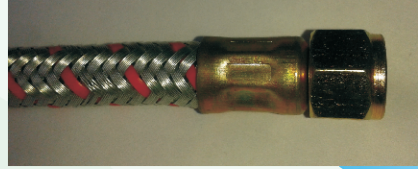

RECOMMENDED FOR	PETROLEUM BASED OIL LINES, LUBE OIL, DIESEL FUEL OIL LINE,AIR AND WATER FOR REGULAR PRESSURE .
CONSTRUCTION	EXTRUDED RUBBER TUBE OIL RESISTANT SYNTHETIC RUBBER WITH RAYON BRAID AND COVERED OUTER WITH GALVANISED ZINC PLATED STEEL WIRE BRAID
STANDARD OPERATING TEMP	EXCEEDS DIN 73379 MAX. 100°C.
DISTINGUISHING MARK	RED VESTAN BAND

DN	NORMAL BORE	MAXIMU WORKING PRESSURE		MINIMUM BRUST PRESSURE	
		PSI	BAR	PSI	BAR
	MM				
4	4.8	775	54	3100	216
6	6.4	700	49	2800	196
7	7	700	49	2800	196
8	8	675	47	2700	188
9	9	675	47	2700	188
10	10	575	40	2300	160
11	11	575	40	2300	160
12	12.7	575	40	2300	160
13	14	500	35	2000	140
16	16	425	30	1700	120
17	17	425	30	1700	120
20	21	350	24	1400	96
26	25.5	325	22	1300	88
32	32	300	21	1200	84
38	38	250	17	1000	68
50	51	200	14	800	56



CEE DEE INDUSTRIES

ISO 9001-2008 certified company

LOW PRESSURE HOSE

PLSS



RECOMMENDED FOR	PETROLEUM BASED OIL LINES, LUBE OIL, DIESEL FUEL LINE AIR, WATER AND L.P.G FOR REGULATOR PRESSURE AND TOUGH HANDLING.
CONSTRUCTION	EXTRUDED RUBBER TUBE OF HIGH FUEL RESISTANT SYNTHETIC RUBBER COVERED OUTSIDE WITH STAINLESS STEEL AISI 304 WIRE BRAID.
OPERATING TEMP	MAX. 100°C.

DN	NORMAL BORE	MAXIMU WORKING PRESSURE		MINIMUM BRUST PRESSURE	
		PSI	BAR	PSI	BAR
	MM				
4	5	660	76	2640	184
6	6.5	550	38	2200	152
7	7	550	38	2200	152
8	8	450	31	1800	124
9	9	450	31	1800	124
10	10	400	28	1600	112
11	11	400	28	1600	112
13	12.7	400	28	1600	112
16	16.8	325	22	1300	88
20	21	280	19	1120	76
25	25.5	250	17	1000	68
32	32	200	14	800	58
38	38	175	12	700	48
50	51	150	10	600	40